

# | Product Description |

1-USB2.0 Port USB over IP Server

# - US-2101 -Single USB2.0 Port Server

**Version : 1.0.1** 2014 - 7 - 1

#### Interfaces

Parallel : 1-USB2.0 high speed compliant port

**LAN** : Compliant with IEEE 802.3/802.3u standards, 10/100Mbps auto-sensing, RJ-45 (UTP) connector

#### Key Software Specification

Network Operating System Support	Windows XP/Vista/7/8/10
	Linux/Mac(print server via LPR)
DHCP (client) Support	Yes
Management	1. Web interface
	2. Windows-based Setup Program
Network Protocol	Proprietary virtual USB protocol
	LPR
Software Upgradeable	Web interface
USB Devices Support	Printer, MFP, Scanner, Mass Storage
USB HUB Support	Up to 4 USB connections
MFP Features Support	Print, Scan, Copy, Fax and Card reader
Windows Scan Utility (WIA) Support	Yes

#### Hardware Specification

USB Port	1-USB2.0 high-speed port
LAN Port	10/100Mbps, auto-sensing, auto-crossover
Reset Button	Yes


Power Adapter	5V/2A, Switching
Dimension	56 (Length) x 52 (Width) x 23 (Height) mm
Weight	32 g (device only)
EMI Certifications	CE / FCC Class B
Temperature	Operating : 0 ~ 50°C; Storage : -5 ~ 65°C
Humidity	Operating : 0 ~ 70%; Storage : 0 ~ 80%

\*As of the release of this specification. The specification is subject to change without prior notice.


## Housing



## System Block Diagram

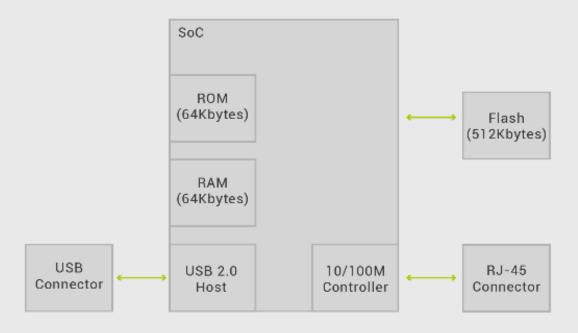

Application

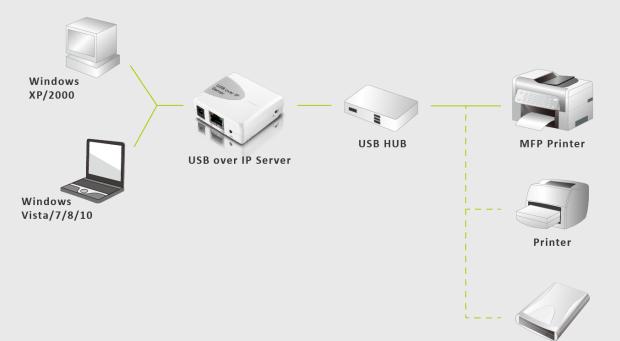

Massive Storage